

FDDC-0.01-260-K25-40-NNM

10KHz~260MHz, 250W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	10KHz~260MHz
Insertion Loss:	0.3dB max.
Coupling:	40±1dB
Coupling Flatness:	±0.5dB max.
Directivity:	14dB min. @10-20KHz 18dB min. @20KHz-260MHz
VSWR:	1.3 max.
Average Power:	250W

Mechanical


Size ^{*1} :	152.4*55.9*55.9mm 6*2.201*2.201in
Connectors:	N male & N femlae
Mounting:	4-M3mm H6 D8

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

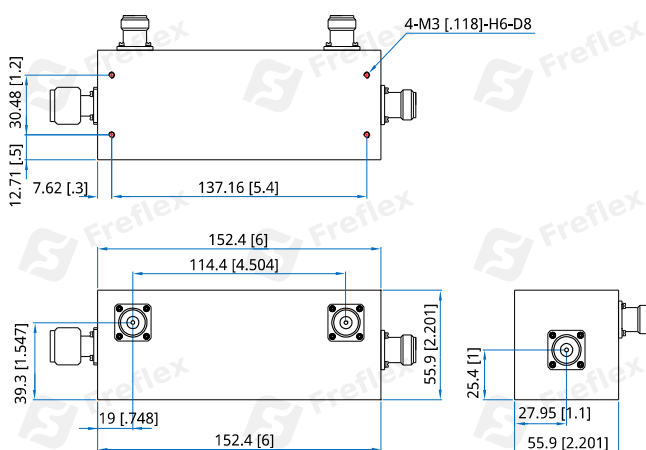

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-0.01-260-K25-40-NNM

Customization is available upon request.