

FDDC-0.01-400-K4-40-NMN

10KHz~400MHz, 400W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	10KHz~400MHz
Coupling:	40±1dB
Coupling Flatness:	±0.5dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.5dB max.
Directivity:	20dB min.
Average Power:	400W CW

Mechanical


Size*1:	152.4*55.9*55.9mm 6*2.201*2.201in
Connectors:	N male & N femlæ
Mounting:	4-M3-6H Depth 8mm

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

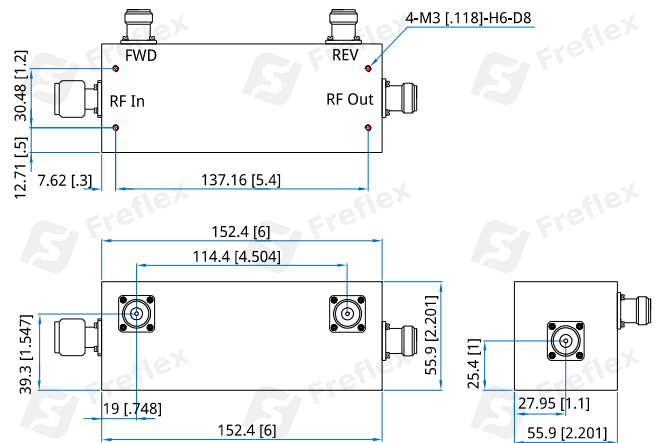

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDDC-0.01-400-K4-40-NMN

Customization is available upon request.