

FDDC-0.03-30-5K25-50-NS

0.03~30MHz, 5250W, 50dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.03~30MHz
Coupling:	50±1dB
Coupling Flatness:	±0.5dB max.
VSWR(Mainline):	1.1 max.
Insertion Loss:	0.05dB max.
Directivity:	20dB min.
Average Power:	5250W CW

Mechanical


Size ^{*1} :	127*76.2*56.9mm 5*3*2.24in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3mm Deep 8

[1] Exclude connectors

Environmental

Operating Temperature:	-55~+75°C
------------------------	-----------

Outline Drawings

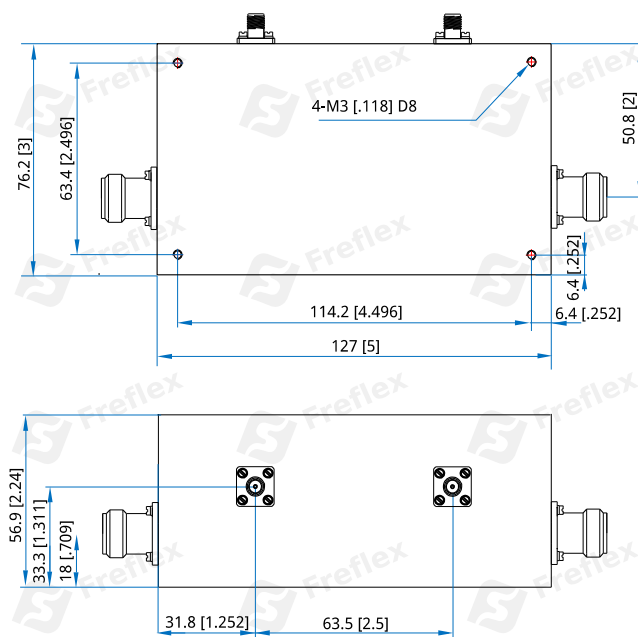

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDDC-0.03-30-5K25-50-NS

Customization is available upon request.