

FDDC-0.3-200-10K-60-LCN

0.3~200MHz, 10KW, 60dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.3~200MHz
Coupling:	60±1dB
Coupling Flatness:	±1dB max.
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.2dB max.
Directivity:	20dB @0.3~100MHz min. 16dB @100~200MHz min.
Power Handling:	10KW

Mechanical

Size ^{*1} :	300*100*100mm 11.811*3.937*3.937in
RF Connectors:	LC female
Coupling Connectors:	N female
Mounting:	4-M5-D10mm

[1] Exclude connectors

Outline Drawings

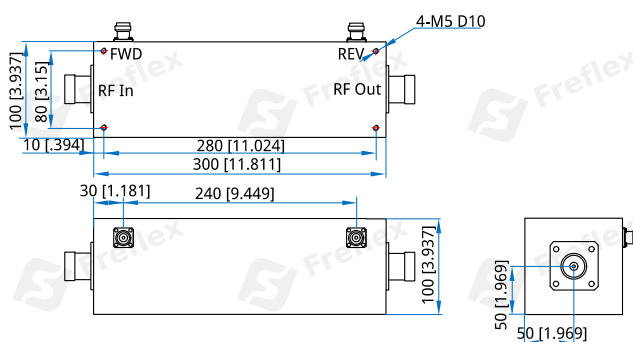

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FDDC-0.3-200-10K-60-LCN

Customization is available upon request.