

FDDC-0.8-30-2K-40-7S

0.8~30MHz, 2000W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.8~30MHz
Insertion Loss:	0.1dB max.
Flatness:	±1dB max.
Coupling:	40±1dB
Directivity:	20dB min.
VSWR:	1.1 max.
Average Power:	2000W

Mechanical


Size ^{*1} :	140*65*50mm
	5.512*2.559*1.969in
RF Connectors:	7/16 DIN Female
Coupling Connectors:	SMA female
Mounting:	2-Φ4.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

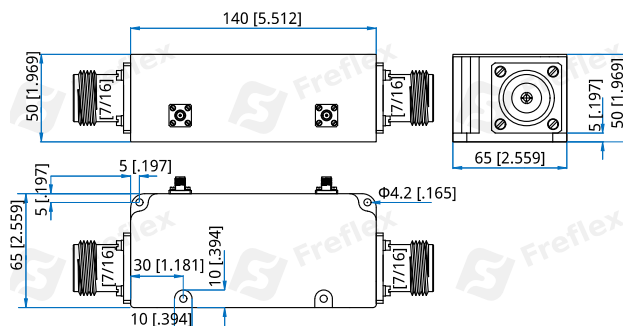

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-0.8-30-2K-40-7S

Customization is available upon request.