

FDDC-1-30-3K-60-NS

0.001~0.03GHz, 3KW, 60dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.001~0.03GHz
Coupling:	60±1dB
Coupling Flatness:	±0.5dB max.
VSWR (Mainline):	1.1 max.
VSWR (Coupling):	1.4 max.
Insertion Loss:	0.1dB max.
Directivity:	20dB min.
Power Handling:	3KW

Mechanical

Size ^{*1} :	100*70*30mm 3.937*2.756*1.181in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through-hole


[1] Exclude connectors

How To Order

FDDC-1-30-3K-60-NS

Customization is available upon request.

Outline Drawings

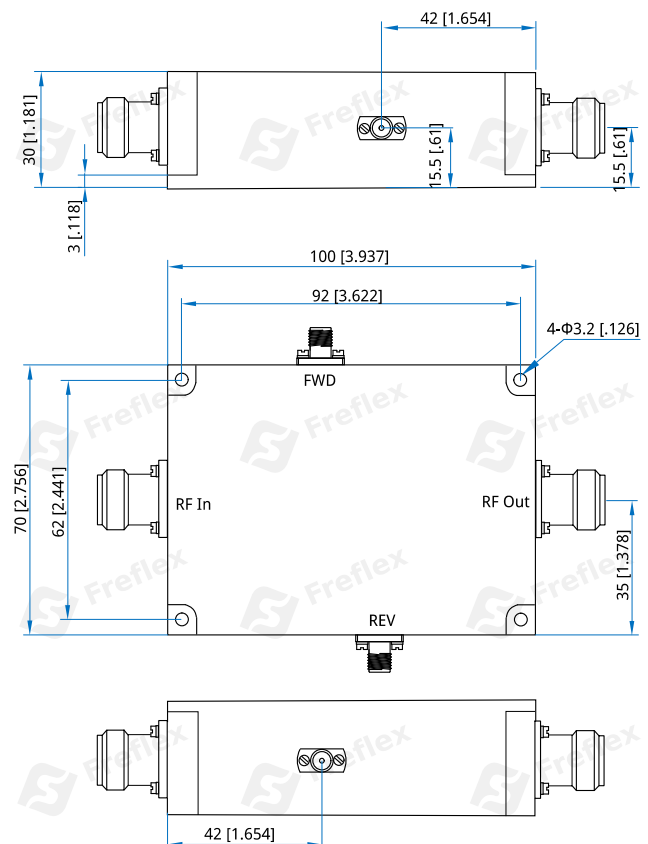

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]