

FDDC-1000-67000-12-10-V

1~67GHz, 12W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	1~67GHz
Directivity:	8dB min.
Coupling Flatness:	±1.7dB max.
Impedance:	50Ω
Average Power:	12W max.

Coupling (dB)	Insertion Loss (dB max.)	VSWR (max.)
10±2	5.7	2


Mechanical

Connectors:	1.85mm Female
Mounting:	2-Φ2.6mm through-hole 4-M2.5*5

Environmental

Operation Temperature:	-55~+85°C
Non-operation Temperature:	-55~+100°C

Outline Drawings

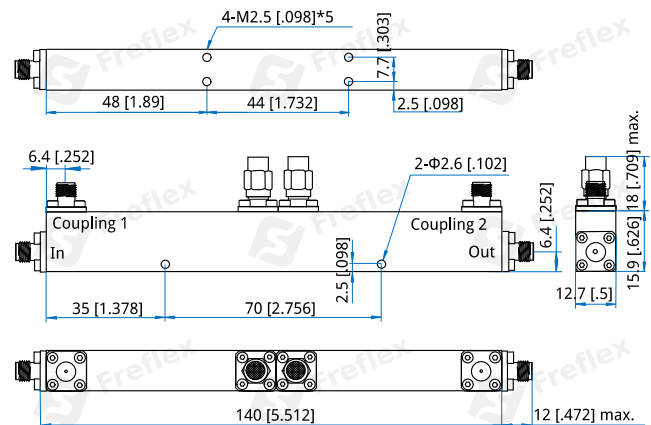

Unit: mm [in]

Tolerance: .x±0.5mm [±0.02in], .xx±0.1mm [±0.004in]

How To Order

FDDC-1000-67000-12-10-V

Customization is available upon request.