

FDDC-12.56-14.56-4K-60-7S

12.56~14.56MHz, 4000W, 60dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	12.56~14.56MHz
Insertion Loss:	0.1dB max.
Coupling:	60±1dB
Directivity:	20dB min.
VSWR:	1.1 max.
Average Power:	4000W

Mechanical


Size ^{*1} :	70*50*50mm
	2.756*1.969*1.969in
RF Connectors:	7/16 DIN Female
Coupling Connectors:	SMA female

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

Outline Drawings

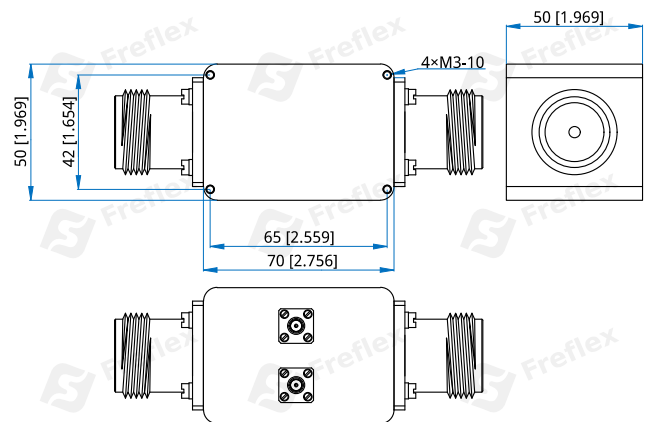

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-12.56-14.56-4K-60-7S

Customization is available upon request.