

## FDDC-1200-1400-3K-40-NS

1.2~1.4GHz, 3000W, 40dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	1.2~1.4GHz
Coupling:	40±1dB
Coupling Flatness:	0.2dB
VSWR (Mainline):	1.1 max.
Insertion Loss:	0.1dB max.
Directivity:	20dB min.
Power Handling:	3000W

### Mechanical


Size <sup>*1</sup> :	50.8*50.8*22.35mm 2*2*0.88in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

### Environmental

Operating Temperature:	-40~+125°C
------------------------	------------

### Outline Drawings

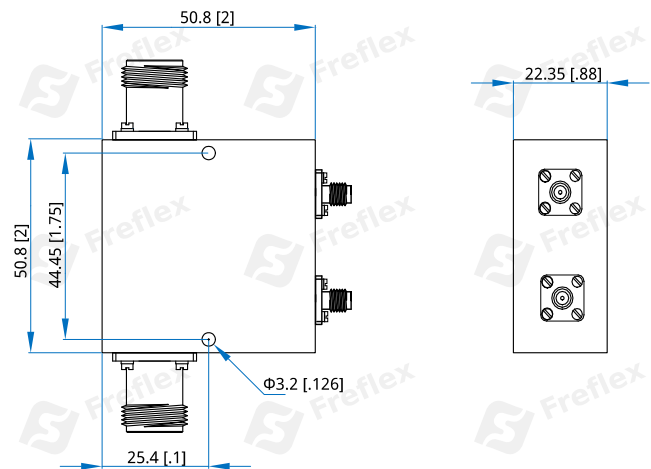

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FDDC-1200-1400-3K-40-NS**

Customization is available upon request.