

FDDC-18000-26500-30-10-S

18~26.5GHz, 30W, 10dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	18~26.5GHz
Insertion Loss:	2.4dB max.
Coupling:	10±1.5dB max.
Frequency Sensitivity:	±1dB max.
Directivity:	10dB min.
VSWR:	1.6 max.
Average Power:	30W

Mechanical


Size ^{*1} :	56*15*11mm 2.205*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.3mm through hole

[1] Exclude connectors

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

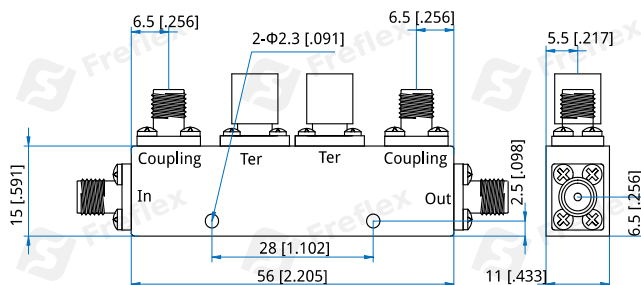

Unit: mm [in]

Tolerance: ±18mm [±0.012in]

How To Order

FDDC-18000-26500-30-10-S

Customization is available upon request.