

FDDC-2-30-10K-63-1

2~30MHz, 10KW, 63dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical


Frequency:	2~30MHz
Coupling:	63±0.6dB
Coupling Flatness:	±0.3dB max.
VSWR (Mainline):	1.1 max.
VSWR (Coupling):	1.25 max.
Insertion Loss:	0.05dB max.
Directivity:	25dB min.
Power Handling:	10KW

Mechanical

Size ^{*1} :	165*118*132mm 6.496*4.646*5.197in
RF In Connectors:	LS2 female
RF Out Connectors:	3-1/8" (IF110)
Coupling Connectors:	SMA female
Mounting:	4-Φ5.2mm through-hole

[1] Exclude connectors

Outline Drawings

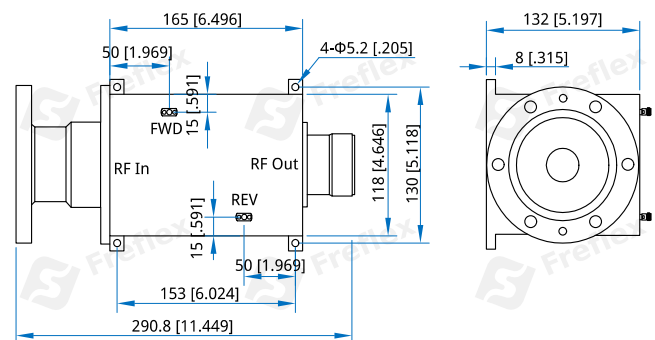

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FDDC-2-30-10K-63-1

Customization is available upon request.