

FDDC-200-2000-K1-30-NS

0.2~2GHz, 100W, 30dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.2~2GHz
Coupling:	30±2dB
VSWR (Mainline):	1.3 max.
Insertion Loss:	0.8dB max.
Directivity:	15dB min.
Average Power:	100W
Impedance:	50Ω

Mechanical


Size ^{*1} :	161.4*24*20mm 6.354*0.945*0.787in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

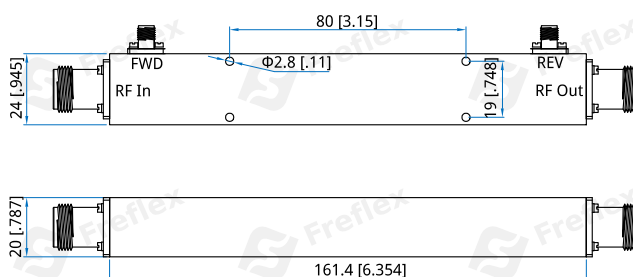

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-200-2000-K1-30-NS

Customization is available upon request.