

## FDDC-200-2000-K2-40-N

0.2~2GHz, 200W, 40dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency:	0.2~2GHz
Coupling:	40±2dB
Coupling Flatness:	±2dB max.
VSWR (Mainline):	1.25 max.
Insertion Loss:	0.4dB max.
Directivity:	15dB min.
Average Power:	200W
Impedance:	50Ω

### Mechanical

Size <sup>*1</sup> :	63.5*38.1*25mm 2.5*1.5*0.984in
Connectors:	N female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

### Environmental


Operating Temperature:	-40~+85°C
------------------------	-----------

### How To Order

**FDDC-200-2000-K2-40-N**

Customization is available upon request.

### Outline Drawings

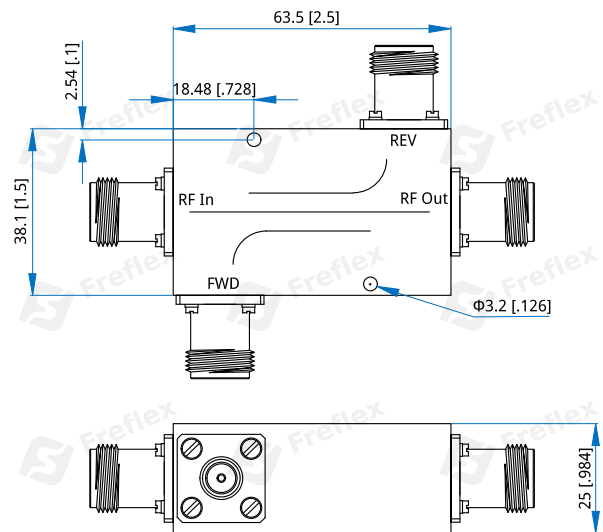

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]