

FDDC-2000-8000-K1-30-N

2~8GHz, 100W, 30dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	2~8GHz
Coupling:	30±1dB
VSWR (Mainline):	1.25 max.
Insertion Loss:	0.5dB max.
Directivity:	15dB min.
Average Power:	100W
Impedance:	50Ω

Mechanical


Size ^{*1} :	60*38.1*27.6mm 2.362*1.5*1.087in
RF In Connectors:	N male
RF Out Connectors:	N female

[1] Exclude connectors

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

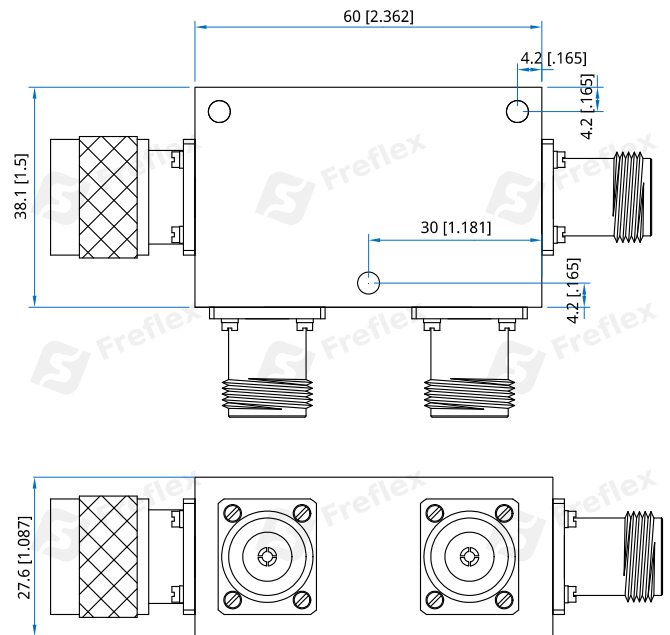

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FDDC-2000-8000-K1-30-N

Customization is available upon request.