

## FDDC-225-460-K5-30-N

0.225~0.46GHz, 500W, 30dB

### Features:

\* Low Insertion Loss

### Applications:

\* Amplifiers  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical


Frequency:	0.225~0.46GHz
Insertion Loss:	0.3dB max.
Coupling:	30±1dB
Directivity:	20dB min.
VSWR (Mainline):	1.1 max.
Average Power:	500W

### Mechanical

Size <sup>*1</sup> :	50.8*51*22.35mm 2*2.008*0.88in
Connectors:	N Female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

### Outline Drawings

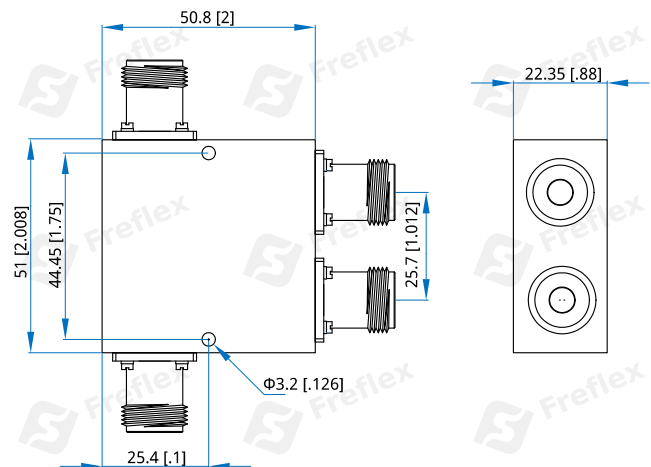

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

### How To Order

**FDDC-225-460-K5-30-N**

Customization is available upon request.