

FDDC-30-80-1K5-50-NS

0.03~0.08GHz, 1500W, 50dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.03~0.08GHz
Insertion Loss:	0.2dB max.
VSWR (Mainline):	1.1 max.
Directivity:	20dB min.
Flatness:	±0.4dB max
Coupling:	50±1dB
Average Power:	1500W
Impedance:	50Ω

Mechanical


Size ^{*1} :	60*36*25mm 2.362*1.417*0.984in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	4-M3, depth 10mm

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

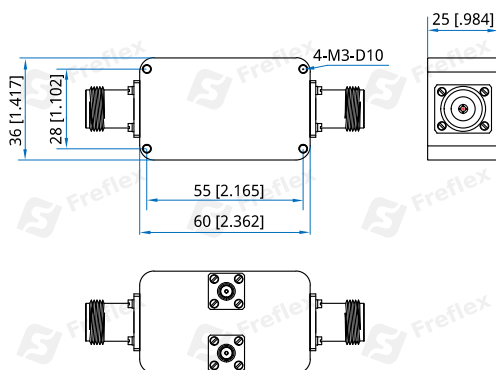

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-30-80-1K5-50-NS

Customization is available upon request.