

FDDC-30-80-2K-60-NS

0.03~0.08GHz, 2000W, 60dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.03~0.08GHz
Insertion Loss:	0.2dB max.
VSWR (Mainline):	1.1 max.
Directivity:	20dB min.
Flatness:	±0.4dB max
Coupling:	60±1dB
Average Power:	2000W
Impedance:	50Ω

Mechanical


Size ^{*1} :	60*40*26mm 2.362*1.575*1.024in
RF Connectors:	N male
Coupling Connectors:	SMA female
Mounting:	4-Φ3.2mm through hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

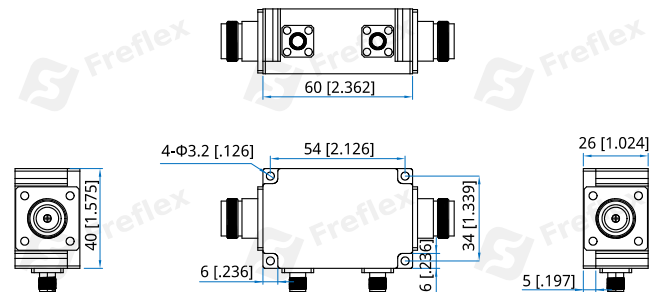

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-30-80-2K-60-NS

Customization is available upon request.