

FDDC-300-4000-60-40-S

0.3~4GHz, 60W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical


Frequency:	0.3~4GHz
Insertion Loss:	0.5dB max.
Coupling:	40±2dB
Coupling Flatness:	±2dB max.
Directivity:	20dB min.
VSWR (Mainline):	1.25 max.
VSWR (Coupling):	2 max.
Average Power:	60W CW

Mechanical

Size ^{*1} :	65*50*20mm 2.559*1.969*0.787in
Connectors:	SMA Female
Mounting:	3-Φ2.8mm through-hole

[1] Exclude connectors

Outline Drawings

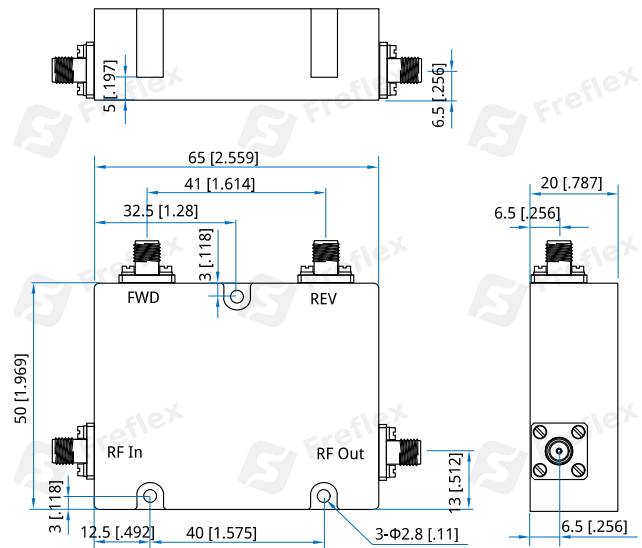

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-300-4000-60-40-S

Customization is available upon request.