

FDDC-300-8000-20-20-S 0.3~8GHz, 20W, 20dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.3~8GHz
Insertion Loss:	1.1dB max.
Coupling:	20±1dB
Directivity:	18dB min.
VSWR:	1.35 max.
Average Power:	20W

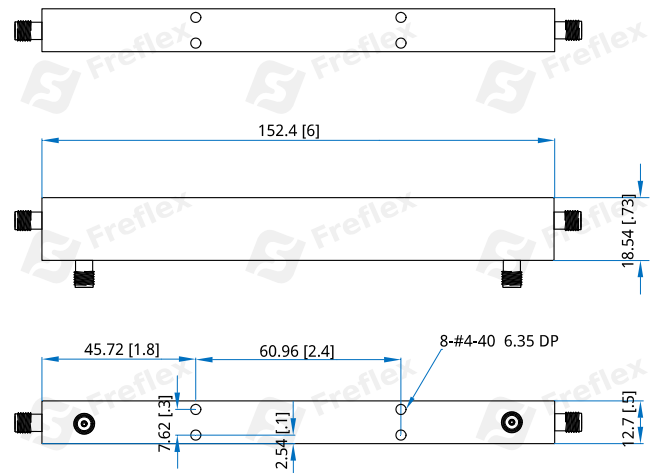
Mechanical

Size ^{*1} :	152.4*18.54*12.7mm 6*0.73*0.5in
Connectors:	SMA Female
Mounting:	8-#4-40 6.35 DP

[1] Exclude connectors

Environmental

Temperature:	-45~+85°C
Extended Temperature:	-55~+100°C

Outline Drawings


Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order
FDDC-300-8000-20-20-S

Customization is available upon request.