

FDDC-33-55-K2-50
33~55MHz, 200W, 50dB

Features:

- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	33–55MHz
Insertion Loss:	0.4dB max.
Coupling:	50±1dB
Directivity:	20dB min.
VSWR (Mainline):	1.2 max.
VSWR (Coupling):	1.5 max.
Average Power:	200W
Peak Power:	500W

Mechanical


Size*1:	50.8*51*22.35mm 2*2.008*0.88in
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-45~+100°C
Non-operating Temperature:	-55~+100°C

Outline Drawings

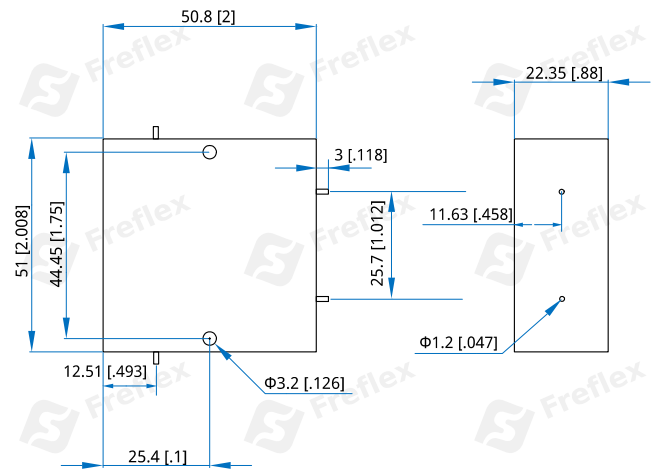

Unit: mm [in]

Tolerance: $\pm 0.3\text{mm}$ [$\pm 0.012\text{in}$]

How To Order

FDDC-33-55-K2-50

Customization is available upon request.