

FDDC-400-6000-K12

0.4~6GHz, 120W

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.4~6GHz
Coupling:	30±1.1, 40±1.1dB
Coupling Flatness:	±1.7dB max.
Insertion Loss:	0.8dB max.
VSWR (Mainline):	1.4 max.
Directivity:	14dB min.
Impedance:	50Ω
Average Power:	120W
Peak Power:	3000W

Mechanical


Size*1:	225.9*30*25mm 8.894*1.181*0.984in
RF Connectors:	N Female
Coupling Connectors:	SMA Female
Mounting:	4-Φ3.2mm through-hole

[1] Exclude connectors.

Environmental

Operation Temperature:	-55~+85°C
------------------------	-----------

Outline Drawings

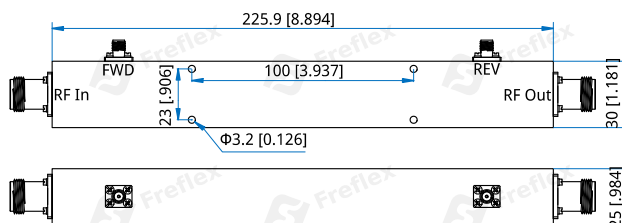

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-400-6000-K12-X-Y

X: Coupling (30dB, 40dB)

Y: Connector type

Connector naming rules:

NS - N female & SMA female

Examples:

To order a dual directional coupler, 0.4~6GHz, 120W, 40dB, N female & SMA female, specify FDDC-400-6000-K12-40-NS.

Customization is available upon request.