

FDDC-4000-6000-60-30-S

4~6GHz, 60W, 30dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	4~6GHz
Coupling:	30±1.5dB
VSWR (Mainline):	1.25 max.
Insertion Loss:	0.4dB max.
Directivity:	15dB min.
Power Handling:	60W

Mechanical


Size ^{*1} :	55*25*25mm 2.165*0.984*0.984in
RF Connectors:	SMA female
Coupling Connectors:	SMA female
Mounting:	3-Φ2.8mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

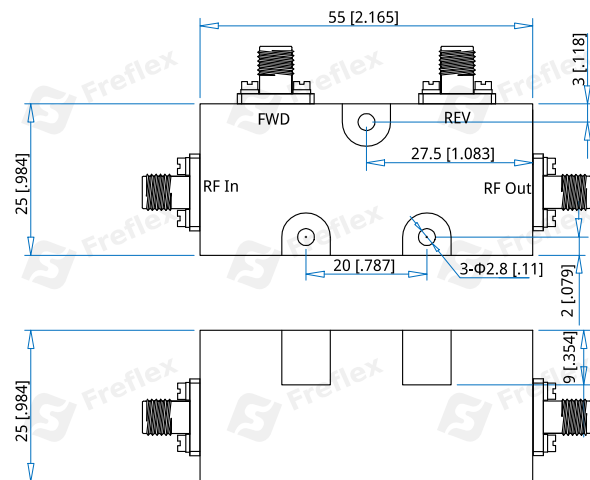

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-4000-6000-60-30-S

Customization is available upon request.