

FDDC-500-2500-K5-40-NS

0.5~2.5GHz, 500W, 40dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.5~2.5GHz
Coupling:	40±1.2dB max.
Coupling Flatness:	±0.5dB max.
VSWR (Mainline):	1.35 max.
Insertion Loss:	0.3dB max.
Directivity:	18dB min.
Average Power:	500W max.

Mechanical


Size*1:	63.5*38*28mm 2.5*1.496*1.102in
RF Connectors:	N female
Coupling Connectors:	SMA female
Mounting:	2-Φ3.2mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-40~+70°C
------------------------	-----------

Outline Drawings

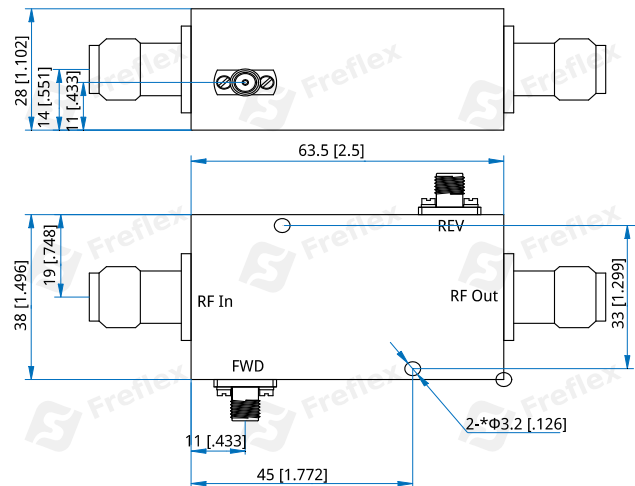

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDDC-500-2500-K5-40-NS

Customization is available upon request.