

FDDC-500-6000-K25-40-N

0.5~6GHz, 250W, 40dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical


Frequency:	0.5~6GHz
Coupling:	40dB (39 ~41.5dB)
Coupling Flatness:	±1dB
VSWR:	1.25 max.
Insertion Loss:	0.5dB max.
Directivity:	10dB min.
Average Power:	250W min.

Mechanical

Size ^{*1} :	131*39*20mm 5.157*1.535*0.787in
Connectors:	N female
Mounting:	4-Φ3.8mm through-hole

[1] Exclude connectors

Outline Drawings

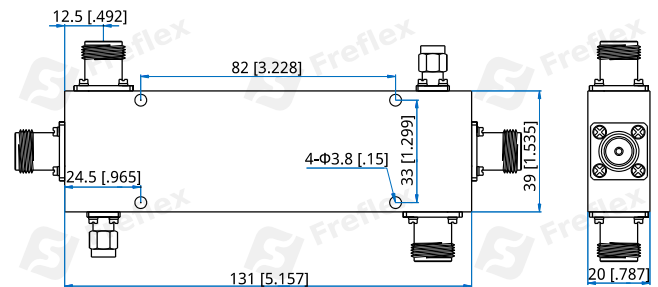

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-500-6000-K25-40-N

Customization is available upon request.