

FDDC-6000-18000-60-20-S 6~18GHz, 60W, 20dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	6~18GHz
Insertion Loss:	1dB max.
Coupling:	20±1dB
Directivity:	12dB min.
VSWR:	1.5 max.
Average Power:	60W min.

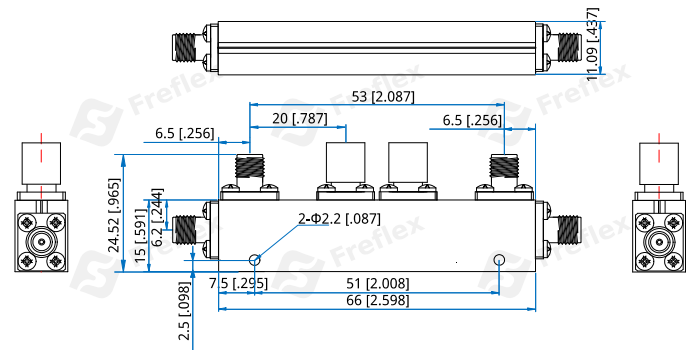
Mechanical

Size ^{*1} :	66*15*11.09mm 2.598*0.591*0.437in
Connectors:	SMA Female
Mounting:	2-Φ2.2mm through hole

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings


Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order
FDDC-6000-18000-60-20-S

Customization is available upon request.