

FDDC-6000-8000-30-30-S

6~8GHz, 30W, 30dB

Features:

* Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	6~8GHz
Insertion Loss:	0.5dB max.
Coupling:	30±1dB max.
Coupling Flatness:	±1dB max.
Directivity:	16dB min.
VSWR:	1.3 max.
Average Power:	30W

Mechanical


Size ^{*1} :	86*17*11mm 3.386*0.669*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through hole

[1] Exclude connectors

Environmental

Temperature:	-40~+85°C
--------------	-----------

Outline Drawings

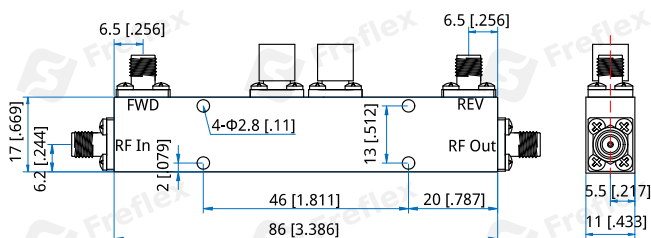

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

FDDC-6000-8000-30-30-S

Customization is available upon request.