

FDDC-9000-13000-75-20-S

9~13GHz, 75W, 20dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	9~13GHz
Insertion Loss:	0.6dB max.
Coupling:	20±1dB
Directivity:	12dB min.
VSWR (Mainline):	1.5 max.
VSWR (Coupling):	1.5 max.
Average Power:	75W

Mechanical


Size ^{*1} :	33*15*11mm 1.299*0.591*0.433in
Connectors:	SMA Female
Mounting:	2-Φ2.3mm through hole

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

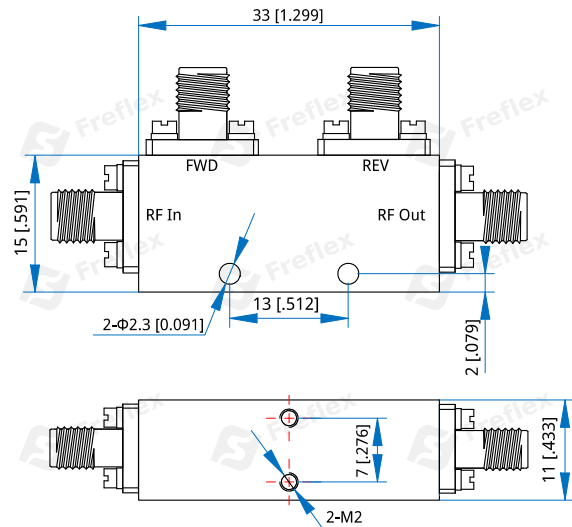

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FDDC-9000-13000-75-20-S

Customization is available upon request.