

FDDC-940-1900-50-20-S

0.94~1.9GHz, 50W, 20dB

Features:

* Low Insertion Loss

Applications:

* Amplifiers
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	0.94~1.9GHz
Insertion Loss:	0.35dB max.
Coupling:	20±1dB max.
Coupling Flatness:	±0.5dB max.
Directivity:	20dB min.
VSWR:	1.2 max.
Average Power:	50W
Peak Power:	500W

Mechanical


Size ^{*1} :	73*20*11mm 2.874*0.787*0.433in
Connectors:	SMA Female
Mounting:	4-Φ2.4mm through-hole

[1] Exclude connectors

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

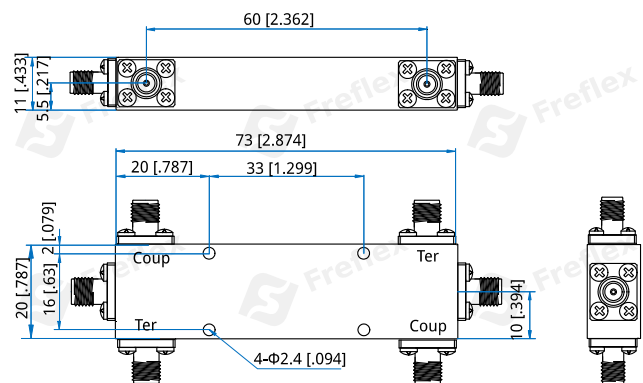

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FDDC-940-1900-50-20-S

Customization is available upon request.