

FELC-KF-5

2.92mm, DC~40GHz

Features:

- * Low VSWR
- * No welding
- * Reusable
- * Easy installation

Applications:

- * Laboratory Test

Electrical

Frequency:	DC~40GHz
VSWR:	1.35 max.
Impedance:	50Ω

Mechanical

RF Connector:	2.92mm female
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental


Temperature:	-40~+105°C
--------------	------------

How To Order

FELC-KF-5

Customization is available upon request.

Outline Drawings

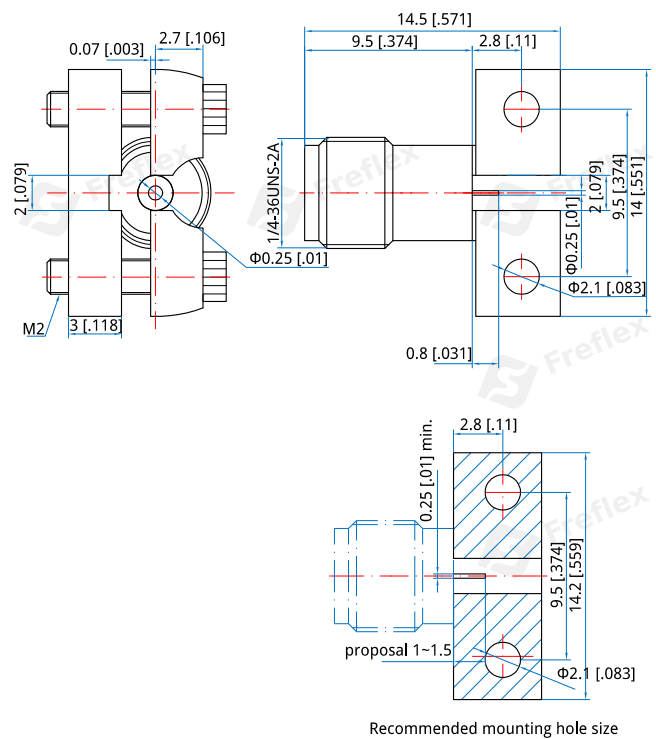

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in](Screw sleeve)