

FCS-FL4G-S-02

SMA Connector, DC~26.5GHz

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2mΩ max.
Voltage Withstand:	1000V DC
Impedance:	50Ω


Mechanical

RF Connector:	SMA Female
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PEI & PTFE
Inner Conductor:	Gold Plated Beryllium Copper
Accept PIN:	ΦDmm, depth 2mm max.

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

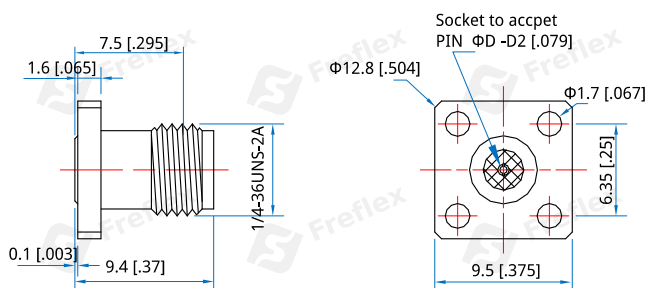

Size	D					
mm	0.23	0.30	0.38	0.46	0.51	0.91
in	0.009	0.012	0.015	0.018	0.02	0.036

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FCS-FL4G-S23-02 - ΦD: Φ0.23mm

FCS-FL4G-S30-02 - ΦD: Φ0.3mm

FCS-FL4G-S38-02 - ΦD: Φ0.38mm

FCS-FL4G-S46-02 - ΦD: Φ0.46mm

FCS-FL4G-S51-02 - ΦD: Φ0.51mm

FCS-FL4G-S91-02 - ΦD: Φ0.91mm

Customization is available upon request.