

FFD10-9900-10100

9.9~10.1GHz

Features:
* Low VSWR

Applications:
* Wireless
* Laboratory Test

Electrical

Input Frequency:	9.9~10.1GHz (0~+5dBm)
Output Frequency:	0.99~1.01GHz
Output Power:	7~10dBm
Divide Ratio:	10
Voltage:	+8V DC
Current:	230mA max.

Mechanical


Size ^{*1} :	35*35*10mm 1.378*1.378*0.394in
Power Supply Connectors:	Feed Through/Terminal Post
RF Connectors:	SMA Female
Mounting:	4-M2.5 through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

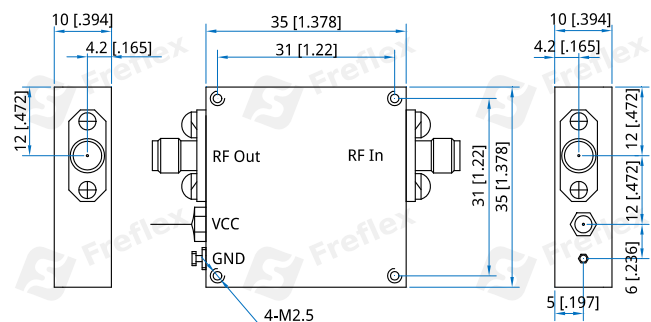

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FFD10-9900-10100

Customization is available upon request.