

FHF-1000-7000-45

1~7GHz, 45dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	1~7GHz
Insertion Loss:	1.0dB max.
VSWR:	1.5 max.
Stopband Attenuation:	45dB min. @DC~0.8GHz
Input Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	30*24.5*10mm 1.181*0.965*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

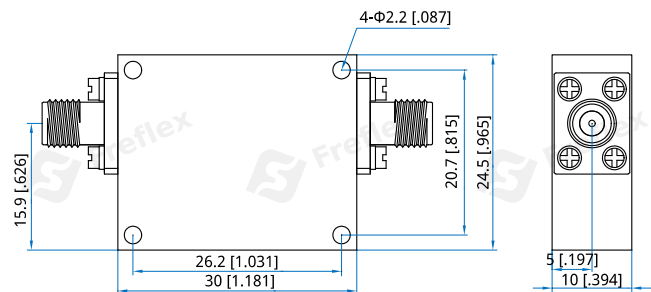

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHF-1000-7000-45

Customization is available upon request.