

FHF-10000-40000-60

10~40GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	10~40GHz
Insertion Loss:	1.5dB max.
VSWR:	2 max.
Stopband Attenuation:	60dB @DC~5GHz min. 20dB @8GHz min.
Input Power:	10W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	20*16*10mm 0.787*0.63*0.394in
Connectors:	2.92mm Female
Mounting:	4-Φ2.2mm through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+85°C
------------------------	-----------

Outline Drawings

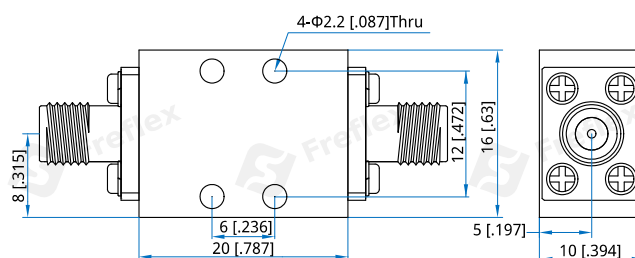

Unit: mm [in]

Tolerance: ±0.508mm [±0.02in]

How To Order

FHF-10000-40000-60

Customization is available upon request.