

## FHF-2000-19000-55

2~19GHz, 55dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

|                          |                       |
|--------------------------|-----------------------|
| Passband:                | 2~19GHz               |
| Passband Insertion Loss: | 1dB max.              |
| VSWR:                    | 2 max.                |
| Stopband:                | 30GHz                 |
| Stopband Attenuation:    | 55dB min. @DC-1.55GHz |
| Average Power:           | 10W max.              |
| Impedance:               | 50Ω                   |

### Mechanical


|                      |                                   |
|----------------------|-----------------------------------|
| Size <sup>*1</sup> : | 27*20*10mm<br>1.063*0.787*0.394in |
| RF Connectors:       | SMA Female                        |
| Mounting:            | 4-Φ2.2mm through-hole             |

[1] Exclude connectors

### Environmental

|              |           |
|--------------|-----------|
| Temperature: | -40~+85°C |
|--------------|-----------|

### Outline Drawings

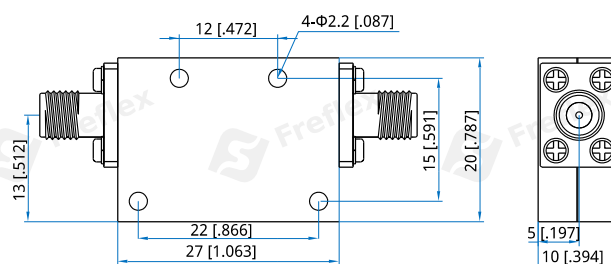

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FHF-2000-19000-55**

Customization is available upon request.