

FHF-2500-14000-60

2.5~14GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	2.5~14GHz
Insertion Loss:	1.2dB max.
VSWR:	2 max.
Stopband Attenuation:	60dB@DC~2.1GHz min.
Input Power:	10W
Impedance:	50Ω

Mechanical

Size*1:	39*20*10mm 1.535*0.787*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental


Operating Temperature:	-40~+85°C
------------------------	-----------

How To Order

FHF-2500-14000-60

Customization is available upon request.

Outline Drawings

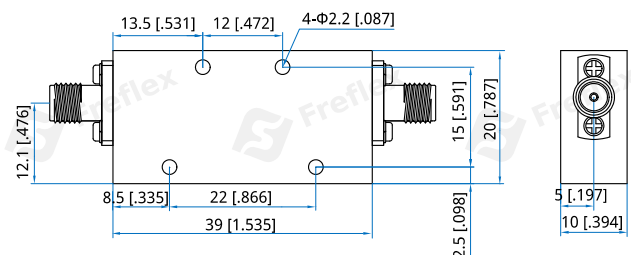

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]