

FHF-26500-40000-60

26.5~40GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	26.5~40GHz
Insertion Loss:	3dB max.
VSWR:	2 max.
Stopband Attenuation:	60dB @3-19GHz min.

Mechanical


Size ^{*1} :	24.4*13*7mm
	0.961*0.512*0.276in
Connectors:	2.92mm Female

[1] Exclude connectors.

Environmental

Operating Temperature:	-45~+75°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

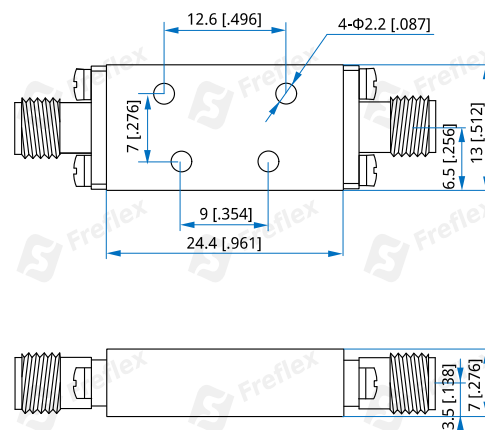

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHF-26500-40000-60

Customization is available upon request.