

FHF-5000-22000-60

5~22GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	5~22GHz
Insertion Loss:	2dB max. @5~5.25GHz 1dB max. @5.25~22GHz
VSWR:	1.5 max.
Stopband Attenuation:	60dB min. @DC~4.48GHz
Average Power:	15W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	35*25*10mm 1.378*0.984*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole
Weight:	0.025kg

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

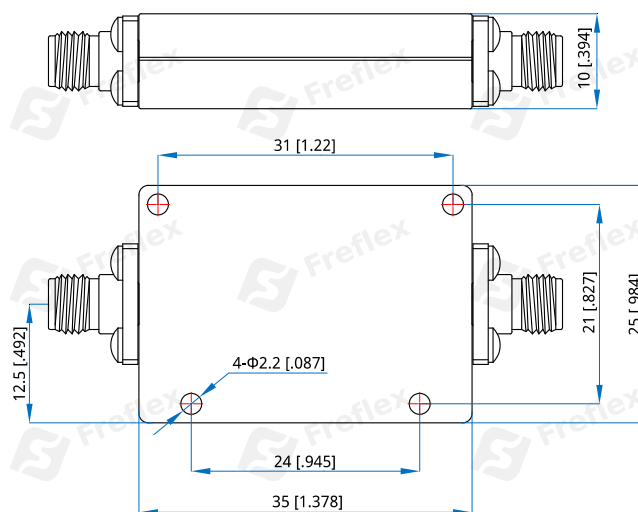

Unit: mm [in]

Tolerance: ±0.3mm [±0.012in]

How To Order

FHF-5000-22000-60

Customization is available upon request.