

## FHF-6000-18000-55

6~18GHz, 55dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical

Passband:	6~18GHz
Insertion Loss:	2dB max.
VSWR:	1.8 max.
Stopband Attenuation:	55dB @DC~5.4GHz min.
Impedance:	50Ω
Average Power:	15W max.

### Mechanical


Size <sup>*1</sup> :	28*25*10mm 1.102*0.984*0.394in
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

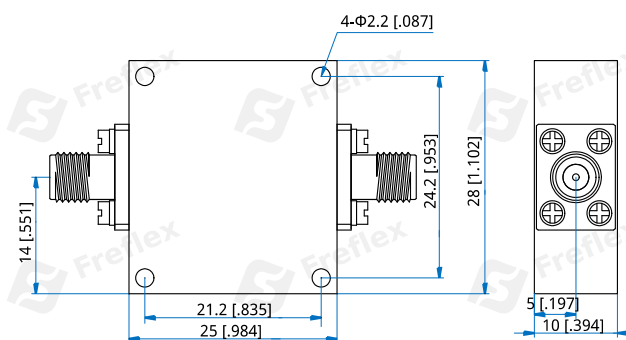

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FHF-6000-18000-55**

Customization is available upon request.