

FHF-7500-24500-60

7.5~24.5GHz, 60dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Passband:	7.5~24.5GHz
Insertion Loss:	2dB max. @7.5~7.9GHz 1dB max. @7.9~24.5GHz
VSWR:	1.5 max.
Stopband Attenuation:	60dB @DC~6.77GHz
Average Power:	15W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	30*21*10mm 1.181*0.827*0.394in
Weight:	20g
Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

Environmental

Temperature:	-55~+85°C
--------------	-----------

Outline Drawings

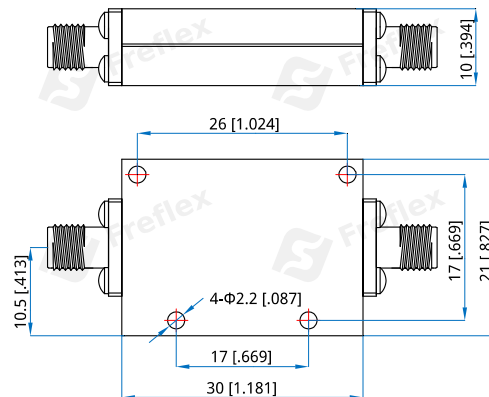

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FHF-7500-24500-60

Customization is available upon request.