

FWT340-6K

WR-340, 6KW

Features:
* Low VSWR

Applications:
* Transmitters
* Antennas
* Laboratory Test
* Impedance Matching

Electrical

Frequency:	2.42~2.48GHz
Average Power:	6KW
VSWR:	1.15 max.
Coupling:	50±0.5dB

Mechanical

Waveguide Size:	WR-340 (BJ26)
Flange:	FDP26
Material:	Aluminium
Finish:	Conductive oxidation
Cooling:	Water cooling

How To Order

FWT340-6K-Y-Z

Y: Material

Z: Flange type

Material naming rules:

A - Aluminum (Outline A)

Flange naming rules:


2 - FDP26 (Outline A)

Examples:

To order a high power waveguide termination, WR-340, 6KW, Aluminum, FDP26, specify FWT340-6K-A-2.

Customization is available upon request.

Outline Drawings

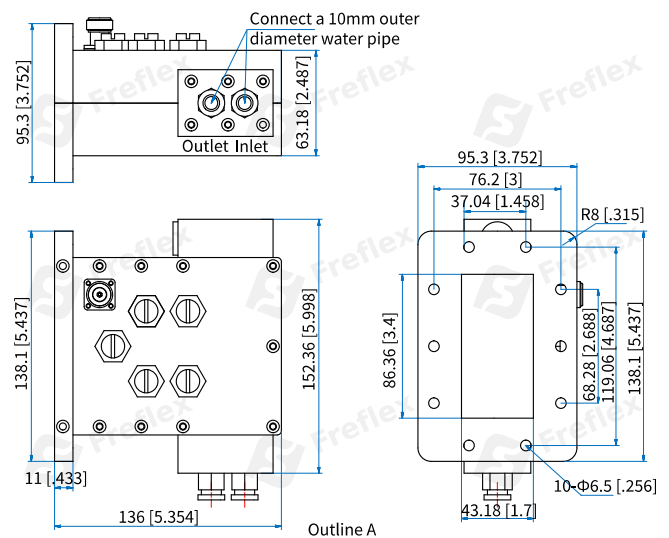

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]