

FWT4-10

WR-4, 10W

Features:

- * Low VSWR
- * Broadband

Applications:

- * Transmitters
- * Antennas
- * Laboratory Test
- * Impedance Matching

Electrical

Frequency: 172~261GHz
Average Power: 10W

Mechanical

Interface: WR-4 (BJ2200)
Flange: FUGP2200
Material: Copper
Coating: Gold plated

How To Order

FWT4-10-Y-Z

Y: Material

Z: Flange type

Material naming rules:

C - Copper (Outline A)

Flange naming rules:


15 - FUGP (Outline A)

Examples:

To order a high power waveguide termination, 172~261GHz, Copper, FUGP2200, specify FWT4-10-C-15.

Customization is available upon request.

Outline Drawings

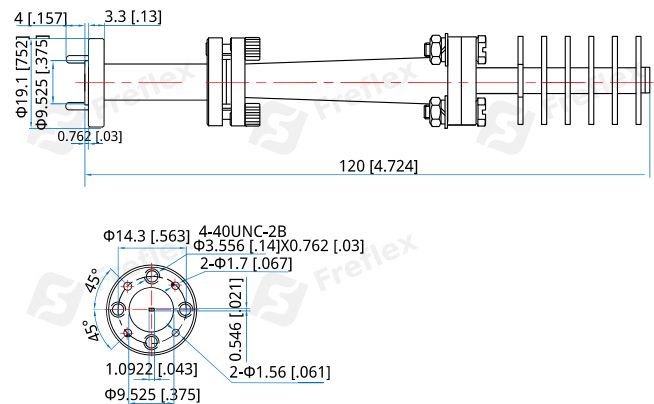

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]