

FL-0-20000-16

DC~20GHz, 16dBm

Features:
* Broadband

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical


Frequency:	DC~20GHz
Insertion Loss:	1.8dB max.
Flat Leakage:	16dBm max.
Power Handling:	37dBm typ.
VSWR:	1.8 typ.
Impedance:	50Ω

Mechanical

Size ^{*1} :	15.24*12.7*10.16mm 0.6*0.5*0.4in
RF Connectors:	SMA
Mounting:	2-Φ2.2mm through-hole

[1] Exclude connectors.

Outline Drawings

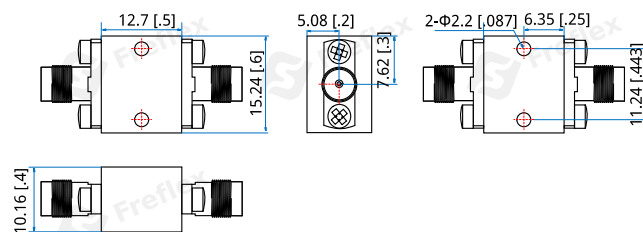

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

FL-0-20000-16

Customization is available upon request.