

FLAS-40000-60000-35-70

40~60GHz, 35dB, 7dB

Features:

- * Broad Band
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	40~60GHz
Gain:	35dB typ.
Gain Flatness:	±2.5dB typ.
Output Power (P1dB):	20dBm typ.
Noise Figure:	7dB typ.
Spurious:	-60dBc max.
Harmonic:	-15dBc typ.
VSWR:	2 typ.
Voltage:	220V AC
Impedance:	50Ω

Mechanical

Size*1:	136*186*52mm
	5.354*7.323*2.047in
RF Connectors:	1.85mm Female

[1] Exclude connectors, rack mount brackets, handles.

How To Order


FLAS-40000-60000-35-70

Customization is available upon request.

Environmental

Operating Temperature:	-20~+50°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

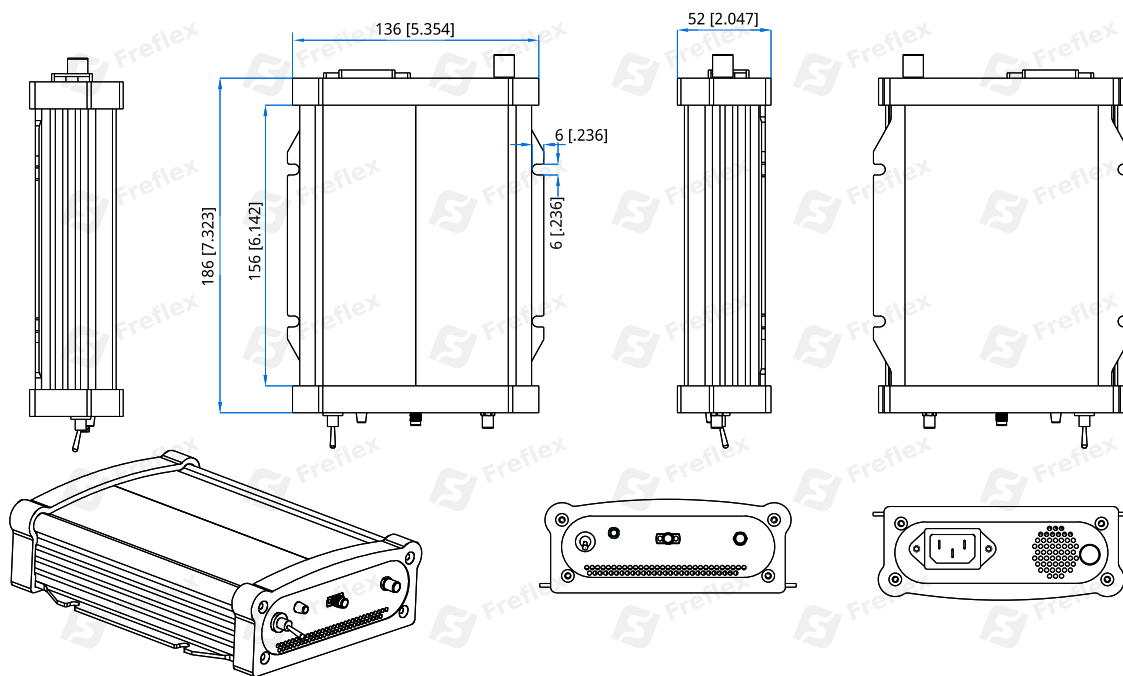

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]