

FLA-10-30000-26-60

0.01~30GHz, 26dB, 6dBm

Features:

- * Broad Band
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

Frequency: 0.01~30GHz
 Current: 440mA
 Voltage: +12~+15Vdc
 Noise Figure: 6dB typ.
 Input Power: +15dBm max.


Frequency (GHz)	Small Signal Gain (dB min.)	Gain Flatness (dB typ.)	Input VSWR (dB typ.)	Output VSWR (dB typ.)	Output Power (Psat) (dBm min.)	Output Power (P1dB) (dBm min.)
0.01~1	26	±1	2.2	2.2	26	25
1~25	26	±1.5	2	2	27	26
25~30	27	±1.5	2	2	26	25

Mechanical

Size*1 52*44*13mm
 2.047*1.732*0.512in
 RF Connectors: SMA Female
 Mounting: 2-Φ2.2 through-hole

[1] Exclude connectors.

Outline Drawings

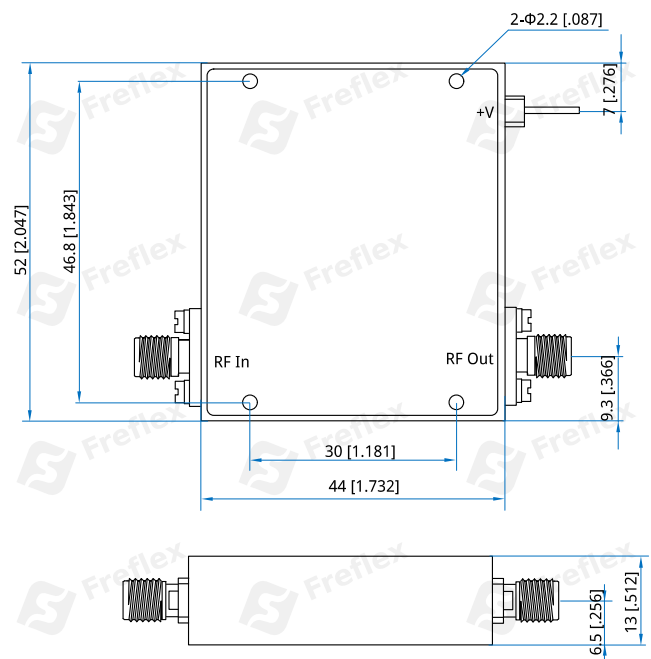

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FLA-10-30000-26-60

Customization is available upon request.