

FLA-18000-28000-20-40

18~28GHz, 20dB, 4dB

Features:

- * Broad Band
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	18~28GHz
Gain:	20dB min.
Gain Flatness:	±1.5dB typ.
Output Power (P1dB):	8dBm typ.
Noise Figure:	4dB max.
Harmonic:	-15dBc typ.
Spurious:	-60dBc max.
Input VSWR:	1.6 typ.
Output VSWR:	1.6 typ.
Voltage:	+5V DC
Current:	200mA typ.
Impedance:	50Ω

Mechanical


Size ^{*1} :	50*30*15mm 1.969*1.181*0.591in
RF Connectors:	2.92mm Female
Power Supply Connectors:	Feed Through/Terminal Post
Housing Material:	Aluminum
Mounting:	4-Φ2.2mm through-hole
Cooling:	External Heatsink (supplied on request only)

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+60°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

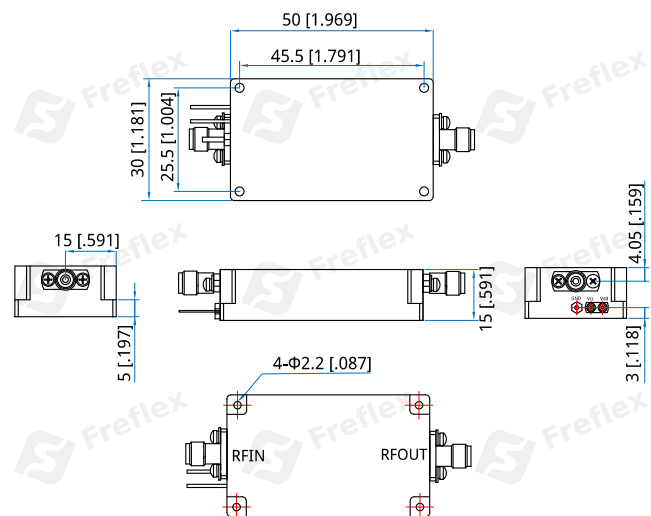

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FLA-18000-28000-20-40

Customization is available upon request.