

FLA-60000-90000-26-43

60~90GHz, 26dB, 4.3dB

Features:

- * Broad Band
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	60~90GHz
Small Singal Gain:	26dB min.
Noise Figure:	4.3dB max.
Input VSWR:	2 typ.
Output VSWR:	2 typ.
Voltage:	+7V DC (+6V min., +10V max.)
Current:	140mA typ.
Impedance:	50Ω
Input Power:	10dBm max.


Mechanical

Size*1:	35*30*22mm 1.378*1.181*0.866in
RF Interface:	WR-12
Flange:	UG-387/U
Power Supply Connectors:	Feed Through/Terminal Post
[1] Exclude connectors.	

Environmental

Operating Temperature:	10~+40°C
Non-operating Temperature:	0~+50°C

Outline Drawings

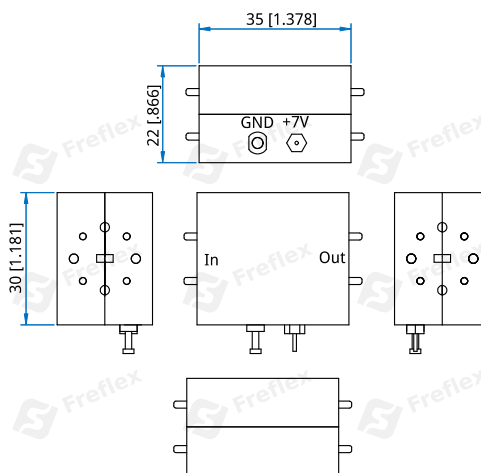

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FLA-60000-90000-26-43

Customization is available upon request.