

FLF-11000-50-1

DC~11GHz, 50dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~11GHz
Stop Band Attenuation:	50dB@12~40GHz min.
Insertion Loss:	2dB max.
VSWR:	1.7 max.
Input Power:	5W max.
Impedance:	50Ω

Mechanical


Size ^{*1} :	60*20*10mm 2.362*0.787*0.394in
Input Connectors:	SMA Male
Output Connectors:	SMA Female
Mounting:	4-Φ2.5mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

Outline Drawings

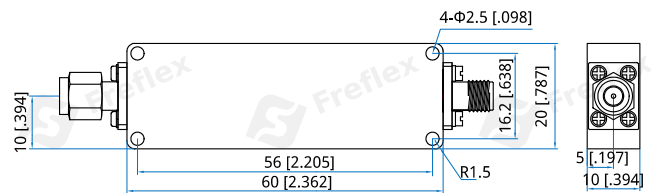

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FLF-11000-50-1

Customization is available upon request.