

FLF-18000-40

DC~18GHz, 40dB

Features:

- * High Stopband Rejection
- * Small Size

Applications:

- * Telecom
- * Laboratory Test
- * Receivers
- * Instrumentation

Electrical

Frequency:	DC~18GHz
Stop Band Attenuation:	40dBc@20~38GHz min. 60dBc@36GHz min.
Insertion Loss:	2dB max.
VSWR:	2 max.

Mechanical


Size ^{*1} :	67*14*10mm 2.638*0.551*0.394in
RF Connectors:	2.92mm Female
Material:	Aluminum
Mounting:	4-M2, depth 3mm

[1] Exclude connectors.

Environmental

Operating Temperature:	-20~+55°C
------------------------	-----------

Outline Drawings

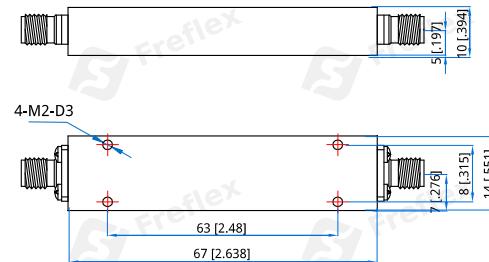

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

FLF-18000-40

Customization is available upon request.