

## FLF-28000-30

DC~28GHz, 30dB

### Features:

- \* High Stopband Rejection
- \* Small Size

### Applications:

- \* Telecom
- \* Laboratory Test
- \* Receivers
- \* Instrumentation

### Electrical


Frequency:	DC~28GHz
Stop Band Attenuation:	30dB@30~38GHz
Insertion Loss:	2dB max.
VSWR:	2 max.

### Mechanical

Size <sup>*1</sup> :	57*16*10mm
	2.244*0.63*0.394in
RF Connectors:	2.4mm Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

### Outline Drawings

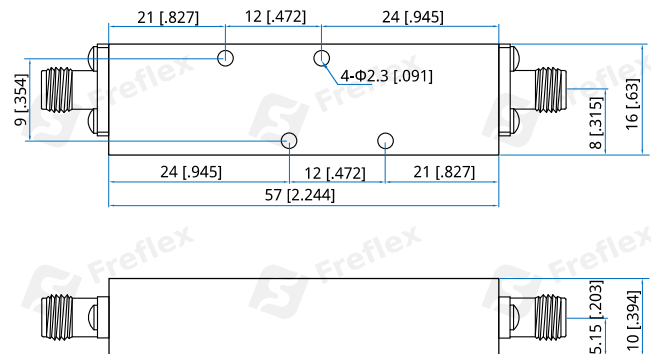

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**FLF-28000-30**

Customization is available upon request.