

FLPA0850

DC~8GHz, 50W

Features:
* Low VSWR
* Low PIM

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~8GHz
VSWR:	1.3 max.
Attenuation:	30dB
Attenuation Accuracy:	±1.2dB
IM3:	-100dBc@2*43dBm max.
Average Power ^{*1} :	50W
Impedance:	50Ω

[1]Derated linearly to 5W@125°C.


Mechanical

Size:	Φ38*105mm Φ1.496*4.134in
RF Connectors:	N male, N female

Environmental

Temperature:	-55~+125°C
--------------	------------

Outline Drawings

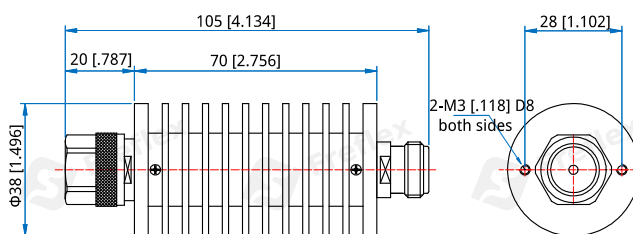

Unit: mm [in]

Tolerance: ±3%

How To Order

FLPA0850-W-X-Y-Z

W: Frequency in GHz

X: Attenuation in dB

Y: Connector type

Z: IM3

Connector naming rules:

N - N male to N female

IM3 naming rules:

100 - 100dBc

Examples:

To order an termination, DC~8GHz, 30dB, N male to N female, -100dBc, specify FLPA0850-8-30-N-100.

Customization is available upon request.